




TECHNICAL SPECIFICATIONS

SPECIFICATIONS ARE SUBJECT TO CHANGE

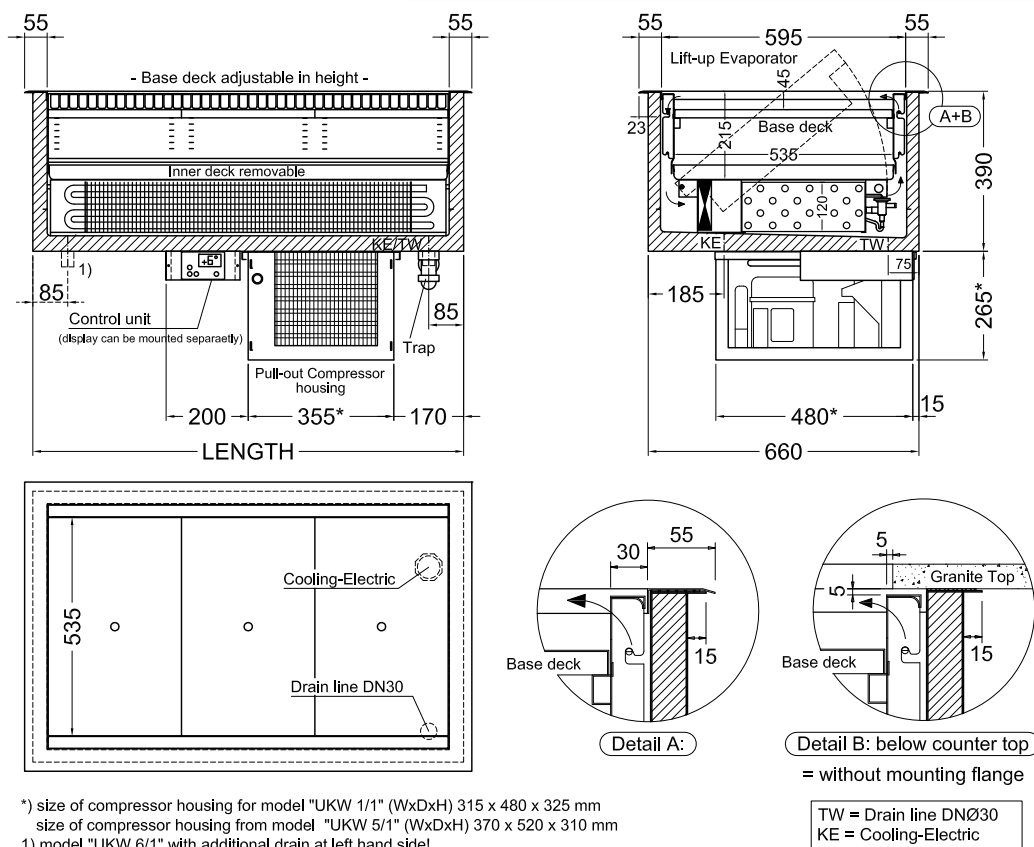

(Sizes in mm)	UKW 1/1-E	UKW 2/1-E	UKW 3/1-E	UKW 4/1-E	UKW 5/1-E	UKW 6/1-E
Frame dimension (represent outside flanges):						
Length x depth	440 x 705	765 x 705	1090 x 705	1415 x 705	1740 x 705	2065 x 705
Outside dimension of the well:						
Length x depth x height	400 x 660 x 715	725 x 660 x 655	1050 x 660 x 655	1375 x 660 x 655	1700 x 660 x 700	2025 x 660 x 700
Usable internal size:						
Length x depth x height	330 x 535 x 180	655 x 535 x 180	980 x 535 x 180	1305 x 535 x 180	1630 x 535 x 180	1955 x 535 x 180
Cut-out size:						
Length x depth	410 x 665	735 x 665	1060 x 665	1385 x 665	1710 x 665	2035 x 665
Granite opening (detail B)	335 x 545	660 x 545	985 x 545	1310 x 545	1635 x 545	1960 x 545
Net content (in Litre)	32	63	95	126	157	188
Refrig. capacity evap. @ -10°C	305 Watt	370 Watt	480 Watt	600 Watt	700 Watt	825 Watt
Refrigerant	R 134a					
Temperature range	+4°C					
Rel. humidity	approx. 80 - 85%					
Power consumption	295 Watt	335 Watt	490 Watt	530 Watt	620 Watt	720 Watt
Daily energy consumption	4,25 kW/24h	4,82 kW/24h	7,06 kW/24h	7,63 kW/24h	8,93 kW/24h	10,37 kW/24h
Voltage	230 V 50 Hz					

Specification at +25°C ambient temperature and 60 % rel. humidity (climate classification 3 acc. to DIN EN ISO 23953).