


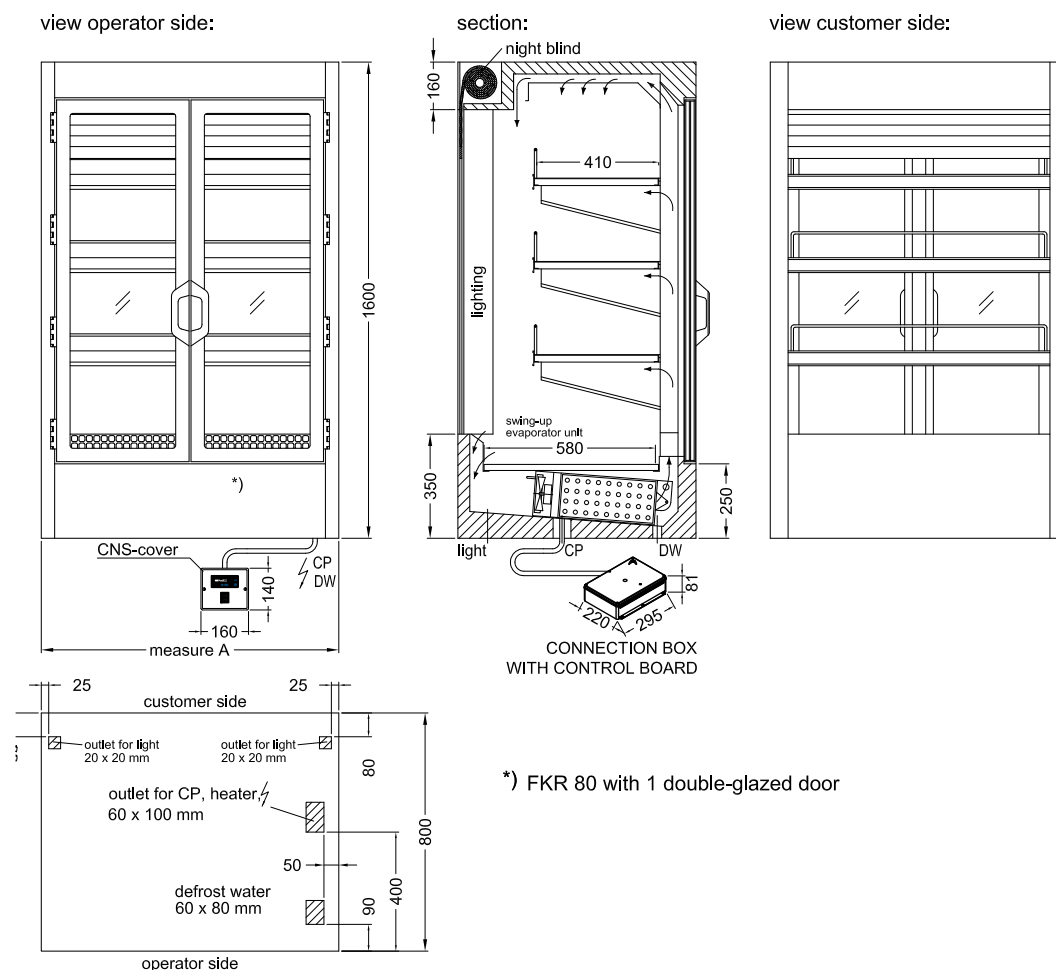

TECHNICAL DATA

SUBJECT TO CHANGE WITHOUT NOTICE

(DIMENSIONS IN MM)	FKR 80	FKR 100	FKR 120	FKR 140	
Outside dimensions:					
Width (measure A) x depth x height	800 x 800 x 1600	1000 x 800 x 1600	1200 x 800 x 1600	1400 x 800 x 1600	
	Effective dimensions:				
	Presentation area in m²	1,28	1,64	2,00	2,37
	Inner well: width x depth	710 x 580	910 x 580	1110 x 580	1310 x 580
	Intermediate shelf: width x depth	710 x 410	910 x 410	1110 x 410	1310 x 410
	Refr. capacity (evap. @ -10 °C)	1145 W	1906 W	1906 W	2057 W
	Refrigerant	R404A			
	Temperature range	+6 °C - +15 °C			
Power input:					
	Operator side with hinged doors	315 W	374 W	380 W	420 W
	Back wall closed	255 W	288 W	288 W	322 W
	Voltage	230 V 50 Hz			

Specification at +25 °C ambient temperature and 60 % RH (climate classification 3 acc. to DIN EN ISO 23953).