




GARMO RDGA-L4

Plug-in 3M1 class



Ultra Energy Low Refrigeration Equipment

GARMO RDGA-L4 plug-in Ultra Low Energy

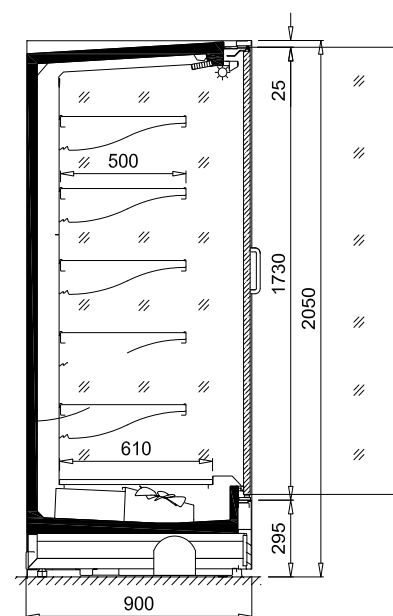

M1 TEMPERATURE CLASS

modules 1.25 1.875 2.5 3.75

Standard features:

- **Plug-in unit 13 A on all models**
- Double glazed soft close doors
- Eco-friendly R600a refrigerant
- Inverter compressor technology
- Led lighting
- Non Lamellar condenser (no maintenance required)
- Very low noise level (<51 dB 2.5 mod.)
- Very low heat emission (1,5 kW per 2.5 mod.)
- Low front the same as a remote version
- Additional accessories
- 5 rows of 500mm hanging shelves adjustable
- Height and inclination (0°, 10°, 20°) + base shelf 620mm
- Price holders on suspended and base shelves (39 mm)
- Transport locks for shelves
- Natural defrosting
- No defrost function

Standard external colours

RAL9003		RAL1023	
RAL3000		RAL5010	
RAL6029		RAL7004	
RAL7016		RAL9005	

Standard screen printing colours

Sidewalls:		
RAL7037		RAL9005
Doors		
RAL7037		RAL9005




GARMO RDGA-L4

plug-in 3M1-I-R600a-DDO-I3-Z

Options:

– flow system compatible


Lighting options:



*requires a special price holder bracket



LEDit tube



MEET THE LEDit FAMILY



Light fitting for refrigeration equipment.




Flat profile lights for refrigeration equipment.



Linear lighting designed for stores, supermarkets



LEDit profile





LEDit tube is mounted in rotary holders (patented pending), which ensures the correct positioning of the luminous flux.



LEDit matt or transparent tubes



Bumper options:

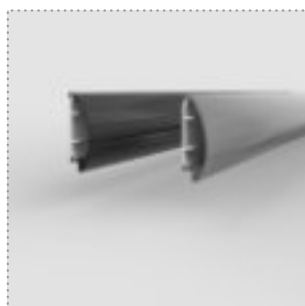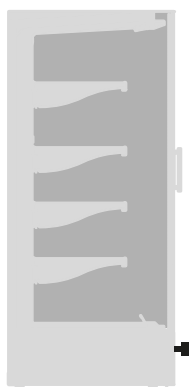

PVC bumper



square bumper



tube bumper 2xØ25

GARMO RDGA-L4

plug-in 3M1-I-R600a-DDO-I3-Z

Sidewall options:



display sidewall




full square sidewall




full square sidewall with mirror

Connection sidewall option:

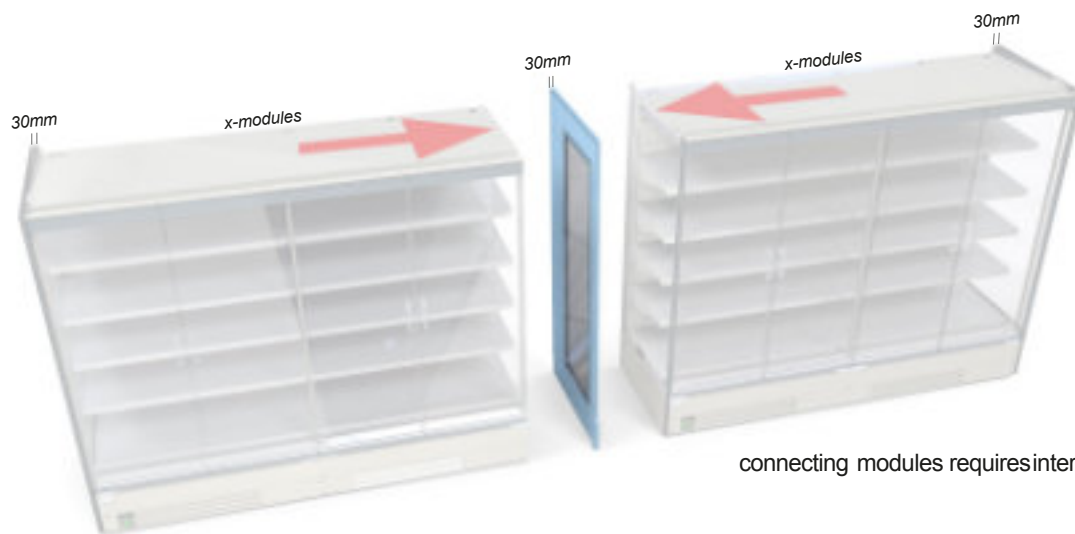

connecting modules requires intermediate sidewall

High mobile divider:

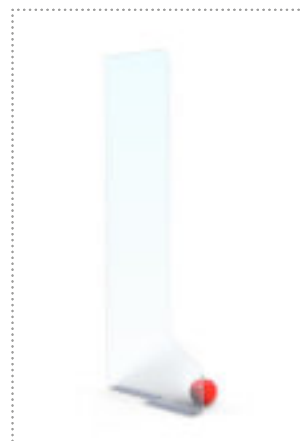



Low mobile divider available in various heights

GARMO RDGA-L4

plug-in 3M1-I-R600a-DDO-I3-Z

Door options:

HV - High Vision door system

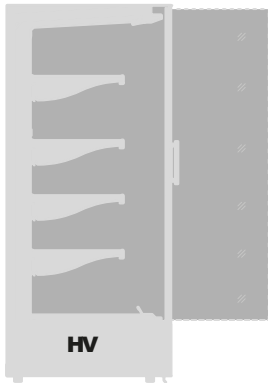

Top




Bottom



High Vision

Highly transparent elements significantly improve the visibility and multiply the spectacular effect. Precise fitting eliminates the requirement for rubber profiles and allows maintaining good parameters of equipment performance at the same time.

DDO - Double doors open

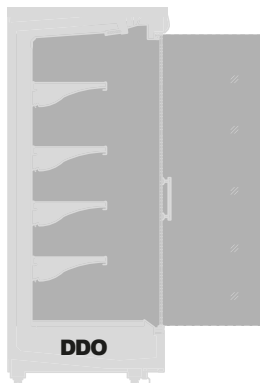


DDO+ transparent frames



Double Doors Open



DDO+ transparent



Double Doors Open

Top



DDO+ transparent



Double Doors Open

Bottom

GARMO RDGA-L4

plug-in 3M1-I-R600a-DDO-I3-Z

Handle options:



transparent handle



C profile handle



Anodized aluminium handle

Display Interior options:



Stainless steel display surface (X5CrNi18-10)

Standard Internal colours

RAL9003		RAL1023	
RAL3000		RAL5010	
RAL6029		RAL7004	
RAL7016		RAL9005	

Evaporator coating options:



Standard



Epoxy coating



Electrophoretic coating

GARMO RDGA-L4

plug-in 3M1-I-R600a-DDO-I3-Z

Price holder options:



DBR price holder - standard

height - 39 mm standard, (52 mm option)



LSR price holder - option

height - 39 mm standard, (30 mm, 52 mm option)



WLK price holder bracket with shelvelighting - option

height - 39 mm standard,

Available colours



white



black



transp



white



black



transp



RAL 7016



light gray



black

Perspex shelf riser options:




Perspex shelf riser height - 80 mm


Standard adjustable shelves:




hanging shelves with adjustable height and inclination (0°, 10°, 20°)

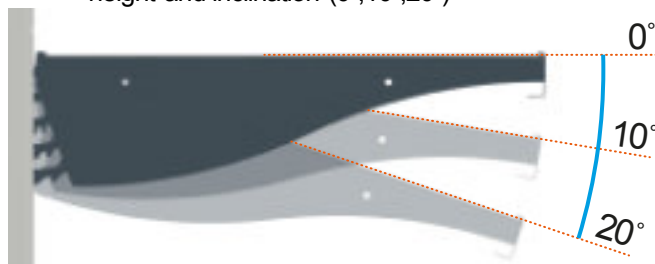

Top mirror option:

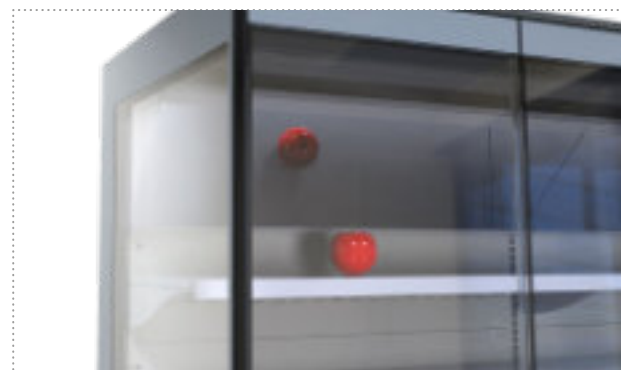

Additional mirror available
The mirror is attached directly to the casing

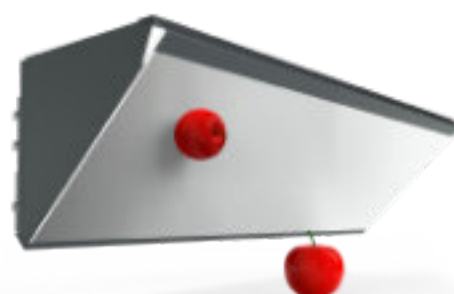

GARMO RDGA-L4

plug-in 3M1-I-R600a-DDO-I3-Z

Wire accessories options:




Bottom wire basket 620mm x 600mm x 220mm



Bottom wire grid 620mm x 450mm

Standard transport lock:

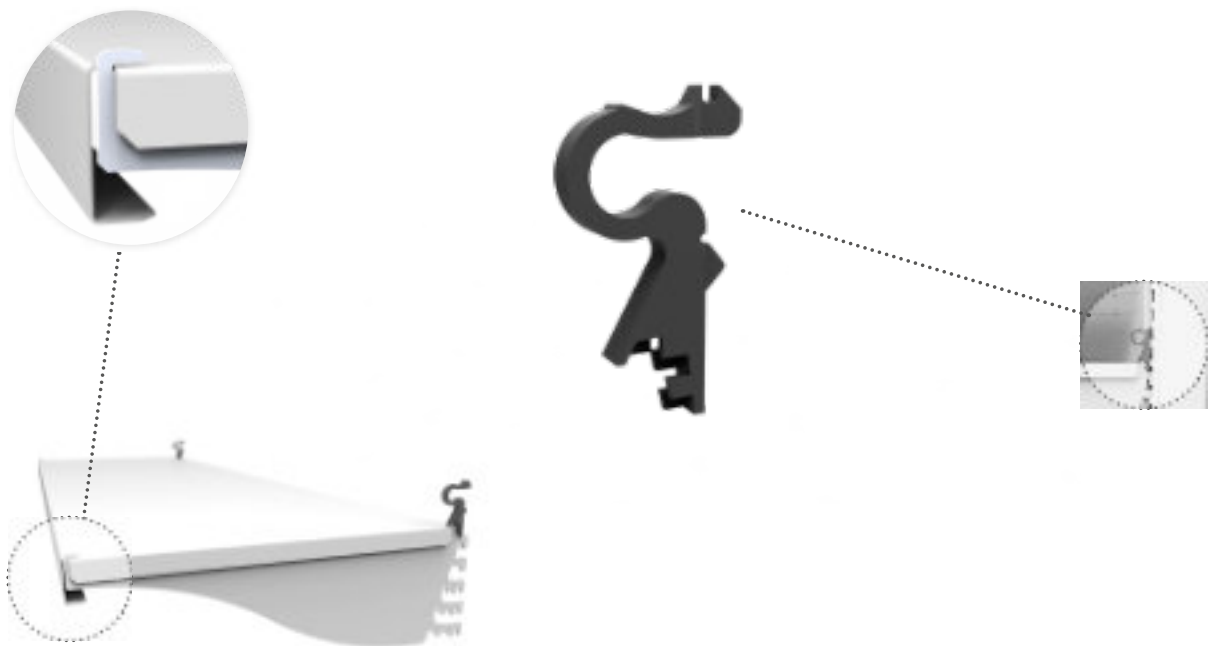


Shelf support transport lock in multidecks.

GARMO RDGA-L4

plug-in 3M1-I-R600a-DDO-I3-Z

Calculations:

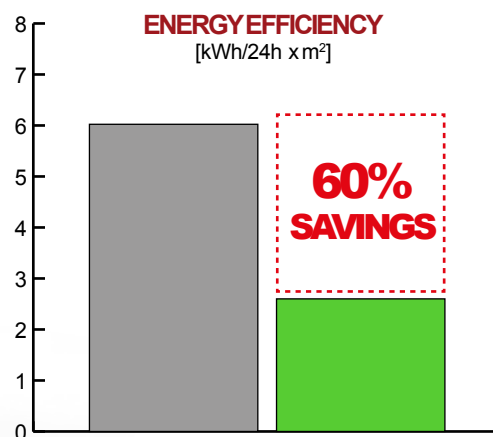

RDGA-L4

MODEL	1.25	1.875	2.5	3.75
ENERGY CONSUMPTION TEC [kWh/24h]	4,2	6,8	8,3	12,5
TOTAL DISPLAY AREA TDA [m ²]	1,58	2,38	3,17	4,75
ENERGY EFFICIENCY EE [kWh/24h x m ²]	2,66	2,86	2,62	2,63

Climate class No. 3
EN ISO 23953-2:2015



Main UK Importers
Capital Refrigeration Services Ltd Est 1967
Unit 45 Hoddesdon Industrial Estate
Hoddesdon
EN11 0FF

Office:
E: jch@capitalref.com
T: 01992 788844